



ACCESORIOS A SUMINISTRAR – INSTALAR




Guía de onda elíptica estándar, 5.6–6.425 GHz, black PE jacket

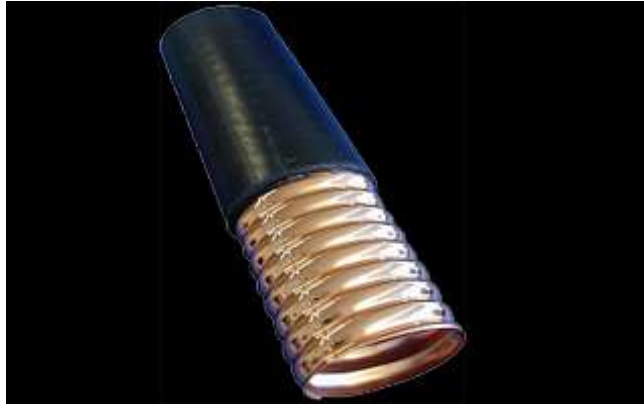

Fixedtuned CPR137G Flange for Elliptical waveguide 52

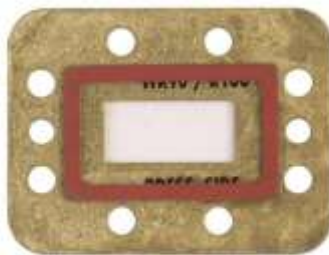

Pressure Window for WR137, 5.85–8.2 GHz, mates to CPR1

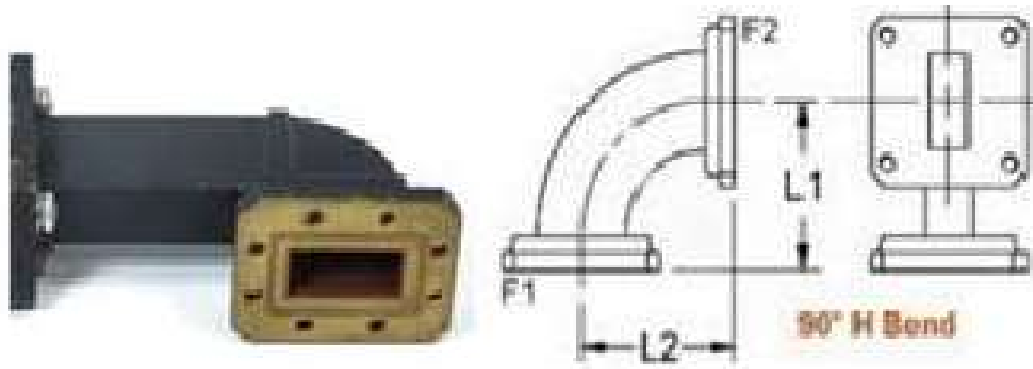

WR137 H Bend 2 x 4 CPRG/CPRF



Grounding Kit for Elliptical waveguide 52 and 63



WR137 Flexible Waveguide, 24 inch length, CPRG/CPRF



Tramo Escalerilla metálica 20 x 8cm X 2.4m



Carreta cable coaxial 300 mts y conectores RF



LNB y Filtros de rechazo 5G los suministra Teleantioquia